U-3

1967 TURFMASTER

Free pivot front wheel suspension—for superb handling qualities.



Differential allows outstanding maneuverability.



Transmission has three forward speeds plus neutral and reverse.

KING 25″ LAWN TRACTOR

MODEL NUMBER: 2855.

ENGINE: 5 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.

ENGINE CONTROL: On dash. Lever controls choke, speed and stop.

TRANSMISSION: 3 Forward Speeds plus Neutral and Reverse. Lever shift. Foot pedal clutch. Differential on rear axle.

BLADE CONTROL: Blade can be disengaged while engine is running. Lever located on dash.

BLADE: One piece austempered steel. Air lift design.

BRAKE: Automotive internal expanding type. Foot control.

WHEELS: Steel. Full pneumatic Terra-Tires. Rear 15 x 6.00. Front 11 x 4.00.

SEAT: Cushion-comfort with back rest.

CUTTING HEIGHTS: 1¾″ to 3½″. Wind-up adjustment.

MISCELLANEOUS: Wheel Base 35¾″. Accessories shown on Page 8.

APPROX. WEIGHTS: Net: 210 lbs. Shipping: 241 lbs.

CONFORMS TO SAFETY ASA STANDARD

RIDING MOWERS

SUPERB STYLING AND OUTSTANDING PERFORMANCE



Wind-up Cutting Height adjustment on 2844. Loosen four bolts — wind — tighten.



Disc Brake on model 2844 means sure stops on hills and grades. Foot pedal control.

Deluxe model has 12" pneumatic rear tires for better traction on hills and grades.



Engine controls are located on dash panel for extra safety and convenience.

	[1] DIAMOND 24" Model 2844	[2] AERO 24" Model 2842
ENGINE:	4 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil Starter.	3½ H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil Starter.
ENGINE CONTROL:	On dash. Lever controls choke, speed and stop.	On dash. Lever controls choke, speed and stop.
TRANSMISSION:	Forward-Neutral-Reverse. Lever shift. Foot pedal clutch control.	Forward-Neutral-Reverse. Lever shift. Foot pedal clutch control.
BRAKE:	Disc type on rear axle. Foot pedal control.	None.
BLADE CONTROL:	On dash. Blade can be disengaged while engine is running.	None.
BLADE:	One piece austempered steel. Air lift design.	One piece austempered steel. Air lift design.
TIRES:	Rear—12 x 3.50 pneumatic. Front—10 x 2.75 semi-pneumatic.	Rear—10 x 3.25 semi-pneumatic. Front 8 x 1.75 semi-pneumatic.
CUTTING HEIGHTS:	1½" to 3". Wind-up adjustment.	2" to 2¾". Blade spacers.
WHEEL BASE:	34¾".	34¼".
APPROX. WEIGHTS:	Net: 165 lbs. Shipping: 182 lbs.	Net: 120 lbs. Shipping: 138 lbs.

ROTARY MOWERS
SELF-PROPELLED

TAKE THE WORK OUT OF MOWING WITH A SELF-PROPELLED



The King has a single lever to adjust all four wheels at same time. 9 cutting heights.



Model 2418 is driven through a transmission. Chain drive to both of the front wheels.

Rubber-to-rubber drive on the Aero. Maximum power transmission, less tire wear.

Drive mechanism can easily be disengaged with sturdy steel control rod. Model 2429.

	1 KING 21" Model 2418	2 AERO 22" Model 2429
ENGINE:	3½ H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.	3½ H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.
CONTROLS:	On handle. One lever controls choke, speed and stop. Other lever controls clutch. Handle locks in operating or storage position.	On handle. One lever controls choke, speed and stop. Sturdy steel rod controls drive.
DRIVE:	Dual front wheel drive. Transmission with chain drive.	Dual rear wheel drive. Rubber-to-rubber.
DECK:	Aluminum alloy. Baffled front and rear. Mulcher plate included.	Steel. 14 gauge. Baffled at rear.
WHEELS:	Steel. 8 x 1.75 Diamond tread tires.	Steel. Rear — 8 x 1.75. Front — 7 x 1.50 Diamond tread tires.
CUTTING HEIGHTS:	9 heights. 1" to 3". Single lever adjustment.	3 heights. 2¼" to 3¼". Adjusted by changing wheel positions.
BLADE:	One piece austempered steel. Air lift design.	One piece austempered steel. Air lift design.
APPROX. WEIGHTS:	Net: 85 lbs. Shipping: 92 lbs.	Net: 69 lbs. Shipping: 77 lbs.

ROTARY MOWERS
HAND-PROPELLED

FINE QUALITY HAND-PROPELLED ROTARY MOWERS



High efficiency deck design smoothly whirls grass into optional catcher.



The King deck is designed for perfect grass ejection. Leaf mulcher included.



Model 2407 has single lever on top of deck that allows adjustment of all four wheels.

Change cutting heights easily on the model 2402 with Redi-Hite—no tools required.

	1 KING 20" Model 2404	2 DIAMOND 20" Model 2407	3 DIAMOND 20" Model 2402
ENGINE:	3 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.	3 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.	3 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.
CONTROLS:	Lever on handle for choke, speed, stop. Handle locks in operating or storage position.	Lever on handle for choke, speed, stop.	Lever on handle for choke, speed, stop.
DECK:	Aluminum alloy. Baffled front and rear. Mulcher plate included.	Steel. 14 gauge. Baffled front and rear. Mulcher plate included.	Steel. 14 gauge. Baffled front and rear. Mulcher plate included.
WHEELS:	Rear — 8 x 1.75. Front — 7 x 1.50 Diamond tread tires.	7 x 1.50 Diamond tread tires.	7 x 1.50 Diamond tread tires.
CUTTING HEIGHTS:	7 heights. 1" to 3". Individual wheel adjustment no tools needed.	9 heights. 1" to 3". Single lever adjusts all four wheels.	5 heights. 1" to 3". Individual wheel adjustment—no tools needed.
BLADE:	One piece austempered steel. Air lift design.	One piece austempered steel. Air lift design.	One piece austempered steel. Air lift design.
APPROX. WEIGHTS:	Net: 55 lbs. Shipping 62 lbs.	Net. 59 lbs. Shipping: 65 lbs.	Net: 54 lbs. Shipping. 59 lbs.

GOOD PERFORMANCE . . . LIGHTWEIGHT . . . ECONOMY PRICE

ROTARY MOWERS
HAND-PROPELLED



Big rear wheels—with engine in perfect balance—make rough mowing jobs easy.



Covered belt from engine crankshaft to heavy duty blade shaft with ball bearings.



Rear baffles on Aero mowers help prevent grass from building up under rear of deck.

Closed handle keeps hands from scraping against bushes, walls, fences, buildings, etc.

	1 DIAMOND 22″ Model 2424 HI WHEELER	2 AERO 22″ Model 2425 • 20″ Model 2405	3 AERO 18″ Model 2485
ENGINE:	3½ H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.	3 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.	3 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.
CONTROLS:	Lever on handle for choke, speed, stop.	Lever on handle for choke, speed, stop.	Lever on handle for choke, speed, stop.
DECK:	Steel. 14 gauge. Baffled front and rear. Mulcher plate included.	Steel. 14 gauge. Baffled at rear.	Steel. 14 gauge. Baffled at rear.
WHEELS:	Rear—Bicycle type 16 x 1.75 semi-pneumatic tires. Front—Steel 8 x 1.75 tires.	7 x 1.50 Diamond tread tires.	6 x 1.50 Diamond tread tires.
CUTTING HEIGHTS:	4 heights. 1″ to 3″. Adjusted by changing wheel positions.	4 heights. 1″ to 3″. Adjusted by changing wheel positions.	3 heights. 1¼″ to 2½″. Adjusted by changing wheel positions.
BLADE:	One piece austempered steel. Air lift design.	One piece austempered steel. Air lift design.	One piece austempered steel. Air lift design.
APPROX. WEIGHTS:	Net: 84 lbs. Shipping: 100 lbs.	22″—Net: 51 lbs. Shipping: 58 lbs. 20″—Net: 47 lbs. Shipping: 52 lbs.	Net: 43 lbs. Shipping: 48 lbs.

REEL MOWERS

REEL MOWERS FOR SMOOTH . . . CLEAN . . . CRISP LAWNS

	1 KING 21" Model 2212 DIAMOND 18" Model 2281 SELF PROPELLED	2 KING 16" HAND MOWER	3 AERO 16" HAND MOWER
ENGINE:	2 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.		
CONTROLS:	On handle. One lever controls choke, speed and stop. Other lever controls clutch. Handle locks in operating or storage position.		
REEL:	5 alloy steel knives. 5 spiders on 21" and 4 spiders on 18". 6" diameter.	Runs on Ball Bearings. 5 knives. 4 steel spiders. 6" diameter.	Runs on Ball Bearings. 5 knives. 3 steel spiders 5½" diameter.
WHEELS:	10" Diamond tread, semi-pneumatic tires.	10" Diamond tread tires. Closed wheels.	9" tires. Spoke wheels.
CUTTING HEIGHTS:	⅝" to 2¾".	⅝" to 2¼"	¾" to 1½"
ROLLER:	Wood. 3 sections. 2½" diameter.		
APPROX. WEIGHTS:	21"—Net: 94 lbs. Shipping: 106 lbs. 18"—Net: 92 lbs. Shipping: 100 lbs.	Net: 43 lbs. Shipping: 46 lbs.	Net: 32 lbs. Shipping: 35 lbs.
MODEL NUMBER:		2166	2165
CUTTING WIDTH:		16"	16"

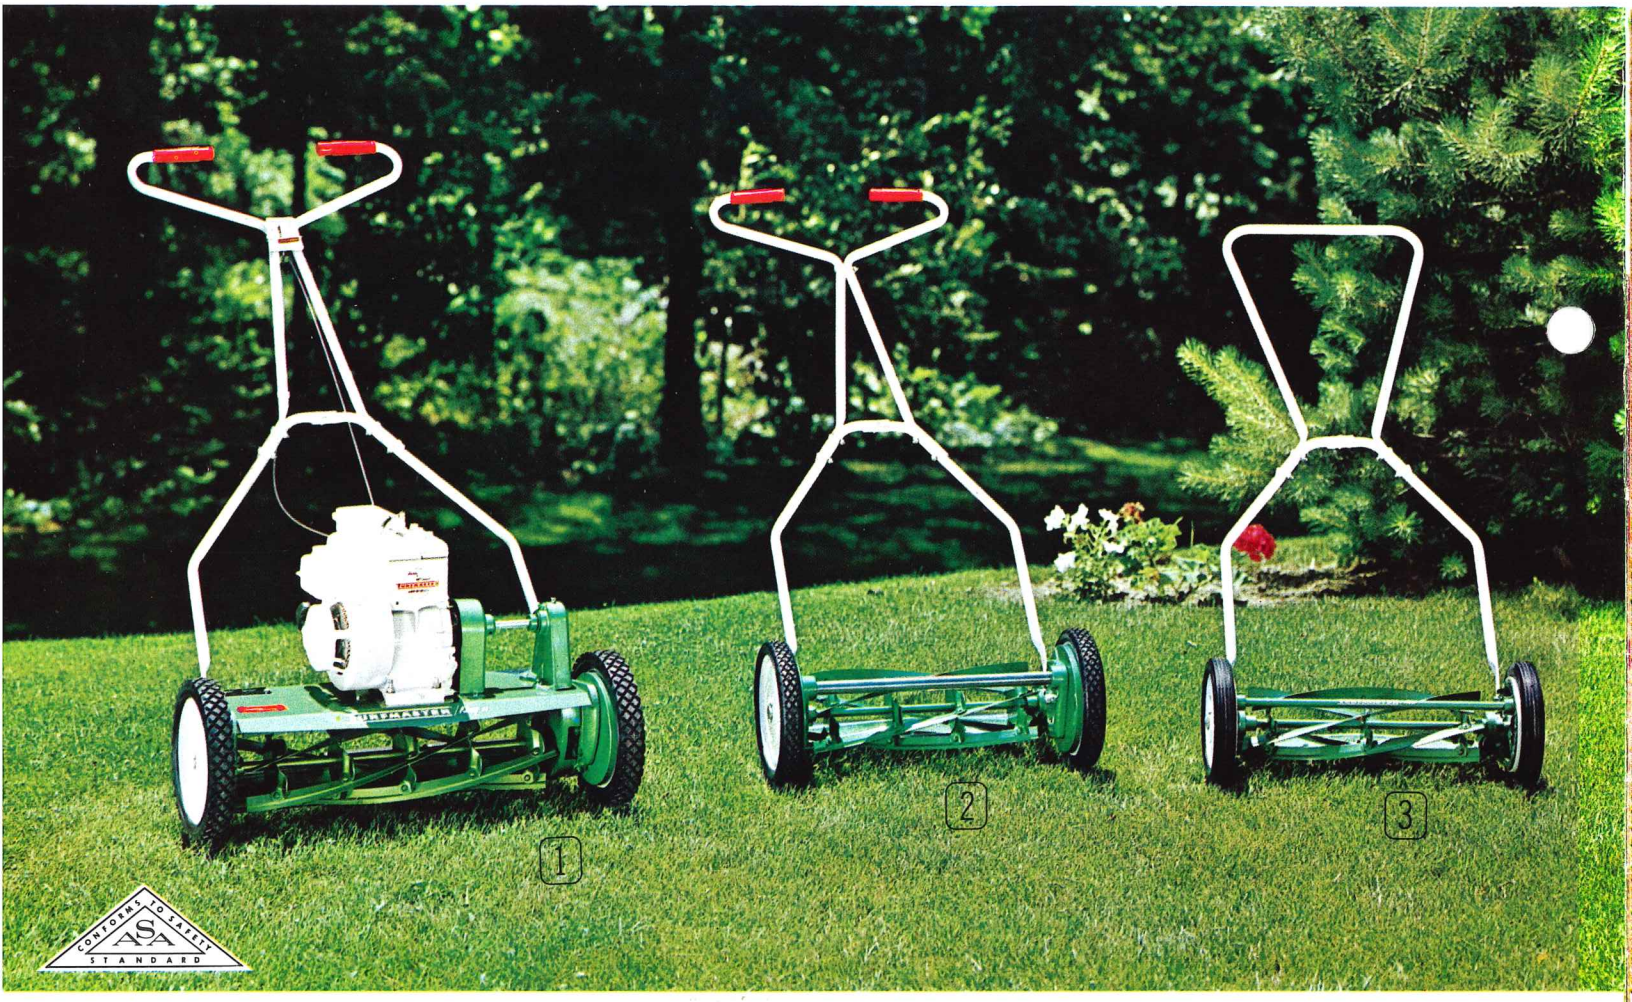

Power Mower wheels can be set in "high" or "low" for adjustment of cutting height.



The drive chain and belts are enclosed above and below the deck for added safety.



Wheels can be placed in "low" or "high" for cutting height. Model 2166.



Cutting heights on Model 2165 Aero mower are changed by raising or lowering roller.



TURFMASTER TILLERS ARE BUILT TO DO A JOB AND DO IT RIGHT

TILLERS

	[1] KING Model 2947	[1] DIAMOND Model 2946 (Same basic design as King)	[2] AERO Model 2945
ENGINE:	4 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.	3 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.	3 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.
DRIVE:	Spring loaded belt tightener type. Forward and Reverse.	Spring loaded belt tightener type. Forward and Reverse.	Cone type with automotive lining. No belts.
CONTROLS:	On handle. One lever controls choke, speed, stop. Other lever controls forward clutch. Hand grip controls reverse clutch.	On handle. One lever controls choke, speed, stop. Other lever controls forward clutch. Hand grip controls reverse clutch.	On handle. One lever controls choke, speed, stop. Other lever controls clutch.
TILLING WIDTH:	14″ to 26″. Extension tine assemblies available for a maximum width of 40″.	14″ to 26″. Extension tine assemblies available for a maximum width of 40″.	14″ to 26″. Extension tine assemblies available for a maximum width of 40″.
TILLING DEPTH:	Depth bar adjustable to control depth of tines. Maximum depth 8″.	Depth bar adjustable to control depth of tines. Maximum depth 8″.	Depth bar adjustable to control depth of tines. Maximum depth 7″.
TINE ASSEMBLIES:	14″ Bolo type. Outside tines reversible.	14″ Bolo type. Outside tines reversible.	12″ Bolo type.
WHEELS:	10″ dia. wheels detachable without tools.	10″ dia. wheels detachable without tools.	8″ dia. wheels detachable without tools.
FURROWER ATTACHMENT:	Kit No. 11755. Optional at extra cost.	Kit No. 11755. Optional at extra cost.	Kit No. 11755. Optional at extra cost.
EXTENSION TINES:	Kit No. 11760. Optional at extra cost.	Kit No. 11760. Optional at extra cost.	Kit No. 11750. Optional at extra cost.
APPROX. WEIGHTS:	Net: 129 lbs. Shipping: 148 lbs.	Net: 122 lbs. Shipping: 141 lbs.	Net: 100 lbs. Shipping: 115 lbs.

The Transmission is built better . . . to last longer.

A. 1″ diameter steel Tine Shaft.
B. Spring loaded Oil Seals—no felt seals.
C. 4 Heavy Duty Roller Bearings.
D. Rugged ⅝″ diameter Drive Shaft.
E. Oversize Oil Impregnated Bearing.
F. Hardened Ground and Polished Steel Worm.
G. Bronze Worm Gear has 4″ pitch dia.
H. Easy access transmission plug. Uses SAE 90 oil.
I. Gray Iron casting—not stamped steel.

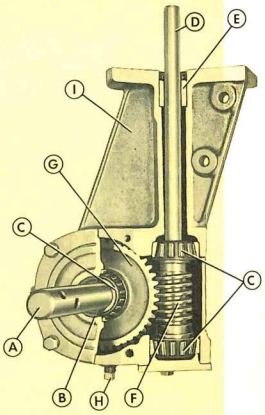

The wheels are removable! Pull pin and entire bracket and wheels can be removed.



Furrower attachment fits on depth bar of Turfmaster tillers. Optional at extra cost.



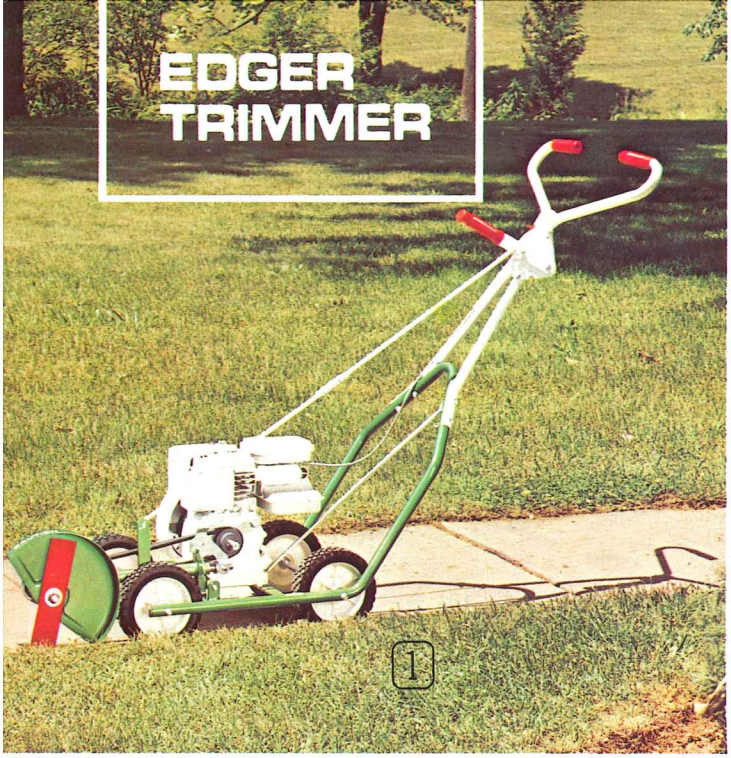

A MUST FOR A WELL GROOMED LAWN

1 KING **Model 2796**
EDGER-TRIMMER

ENGINE:	2 H.P. Briggs & Stratton, 4 cycle. Choke-A-Matic carburetor. Recoil starter.
DRIVE:	"V" Belt from pulley on engine crankshaft. Belt-tightener clutch.
CONTROLS:	On handle. One lever controls choke, speed and stop. Other lever controls clutch.
WHEELS:	All 4 wheels: 7 x 1.50.
HEIGHT ADJUSTMENT:	Regulated with lever on handle.
BLADE:	One piece. 9" tempered steel.
APPROX. WEIGHTS:	Net: 49 lbs. Shipping: 53 lbs.

When in Trimmer Position, the King clips under bushes, fences and close to trees.



LAWN TRACTOR OPTIONAL EQUIPMENT

Accessories for use with Model 2855 Only.

Snow Plow — Model 9063. Blade is 36" wide. Tire chains included.



Utility Cart — Model 9047. Steel dump bed is 24" x 36" x 8". 10" tires.



Spiker-Aerator — Model 9046. 24" wide and has tray for extra weight.



Roller — Model 9045. 24" wide x 18" diameter. Water ballast—250 lbs.

Spreader/Seeder—Model 9004. 30" coverage, holds 80 lbs. 12" tires.



Over 1500 Turfmaster Authorized Service Stations. A service directory included with each power mower.

GANG MOWERS

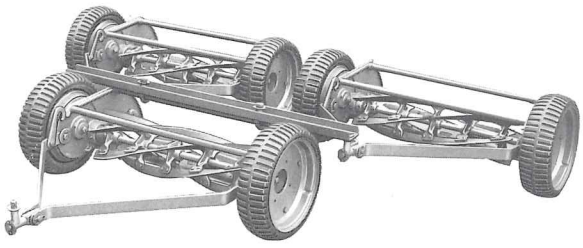

Ideal for large lawns, parks, estates, etc. Available as a 3 gang mower with a 60" cutting width. Not recommended for use with tractors having less than 5 H.P.

ACCESSORIES



Grass Catchers. Available for all rotary and reel mowers. Easy to install and operate.

Galvanized Gasoline Cans. Flexible spouts. 1 gal., 2½ gal., 5 gal., round or square.



Cutter Bars. Scientifically designed and engineered for longer life and smoother cutting.

Oil Spouts. A must for power mower owners. Designed for dispensing canned oil.

Dille & McGuire
A wholly owned subsidiary of:
THE HUFFMAN MANUFACTURING COMPANY
Corporate Offices: P.O. Box 1036 • Dayton, Ohio 45401
FACTORIES: Celina and Delphos, Ohio • Richmond, Indiana • Azusa, California

24C-766

Specifications subject to change without notice.
Printed in U.S.A.

ORDER DEPARTMENT:
N. 13th & "F" Streets,
Richmond, Indiana 47374
Tel. (317) 966-0555